

DELTA-50



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 4-6 ohm
- * Recommended Amp Power: 25-150 W
- * Frequency Response: 45 Hz - 35 kHz
- * Sensitivity: 89 dB / 2,8V / 1 m
- * Crossover frequency: 450 HZ / 4 KHZ

SYSTEM COMPONENTS:

- * Cabinet: CDELTA-50 (Not for sale)
- * Grille: GDELTA-50 (2402570)
- * Woofer: HT170IY16 170mm Woofer (2)
25mm voice coil
- DC Resistance: 9,1 ohm
- * Midrange: TC11MGZA-06 115mm Midrange
25mm voice coil

SYSTEM COMPONENTS: (cont'd)

- DC Resistance: 4,3 ohm
- * Tweeter: EMIT-R DELTA
- DC Resistance: 3,5 ohm
- * Crossover Network: NDELTA-50 (2702570)
- * Crossover Network: NDELTA-50 (2702572)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 36,7x8,9x13,9 In. D
(931x226x352.5mm D)
- * Shipping Weight: 46 lbs. (21 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product


PACKAGE

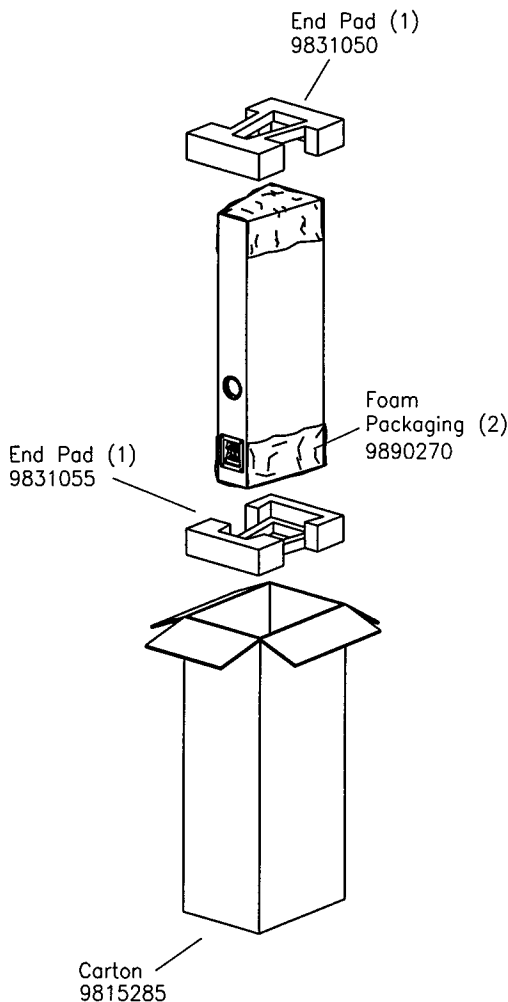


WIRING DIAGRAM

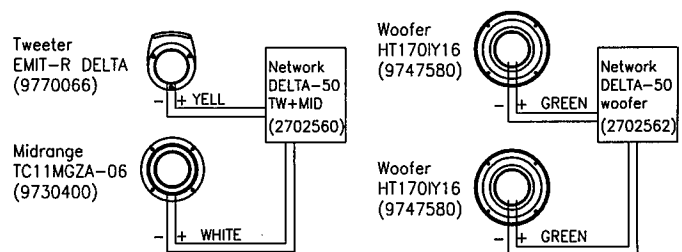

SCHEMATIC DELTA-50 WOOFER

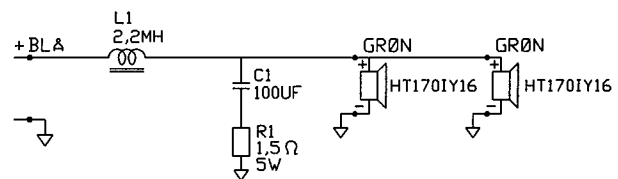

SCHEMATIC DELTA-50 TW - MID

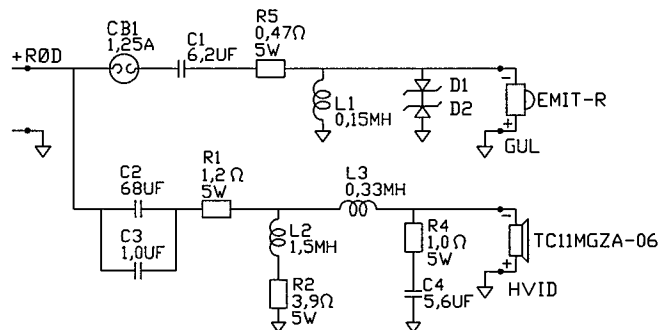


NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

DELTA-50

DELTA-50

COMPONENT EXPLODED VIEW

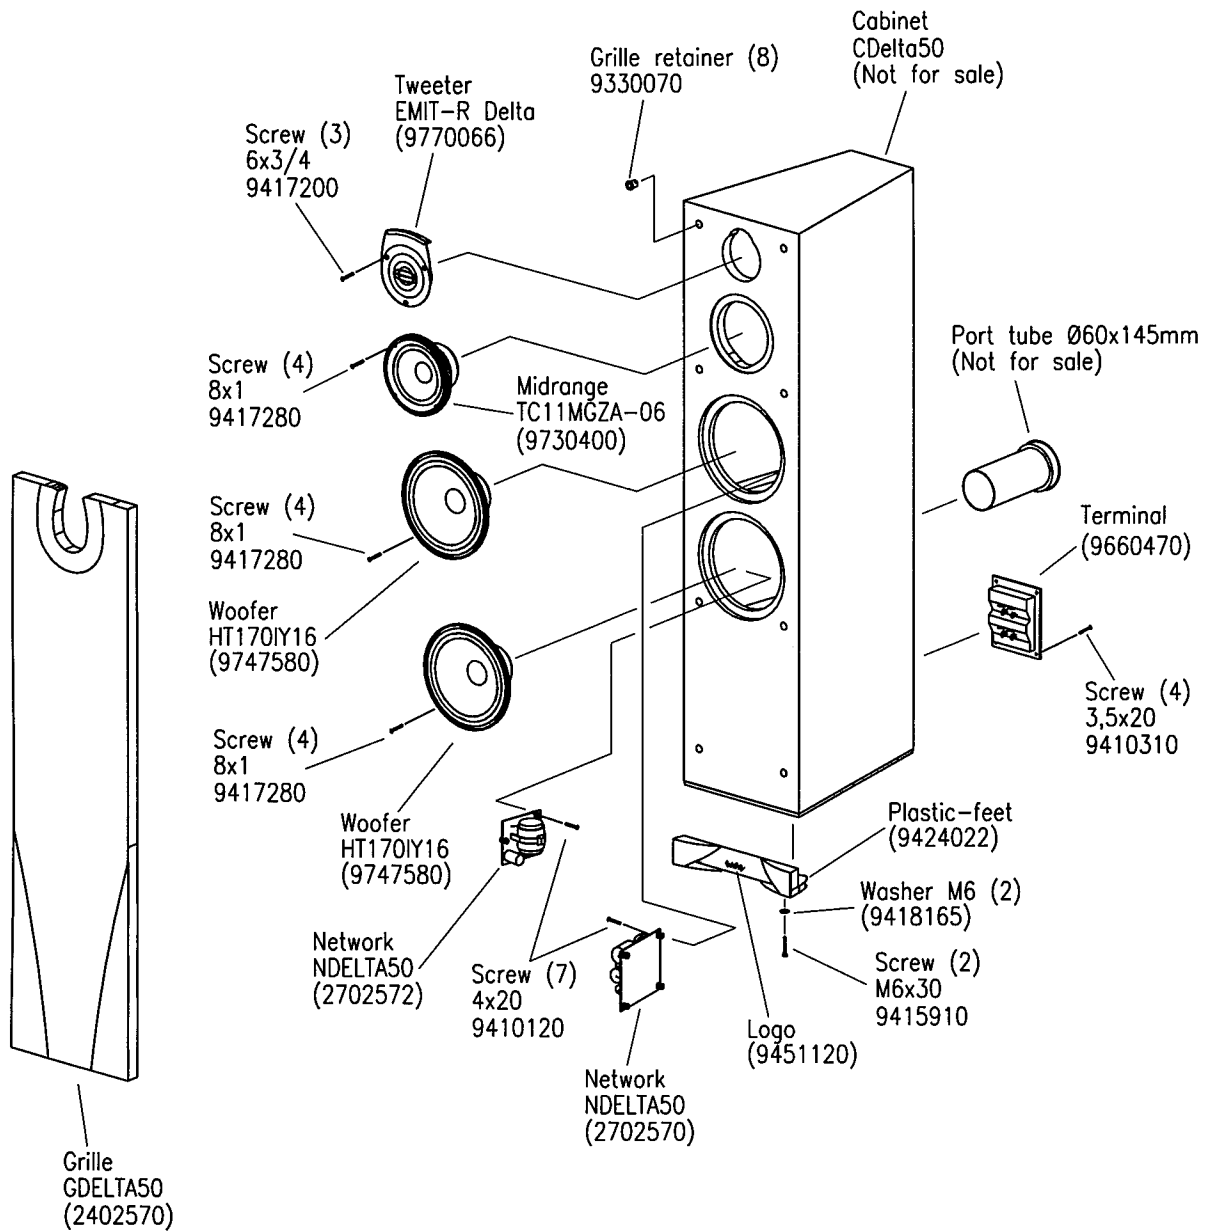

- Spike (1) (9431380)
- Spike (2) (9431250)
- Nut M6 (3) (9418400)
- Robberfeet (1) (9331300)
- Robberfeet (2) (9331550)

DELTA-50